


Remote Control Sets

with Flame Height Adjustment for Fireplaces, Gas Space Heaters and Patio Heaters

- Battery powered, no external power required
- Compact receiver design

Options

- Room temperature display in °F / °C changeable
- Remote control with two button operation prevents accidental lighting (per GAD90/396/CE)
- Programmable room temperature
- Automatic temperature control regulates to room temperature setting
- Timer function

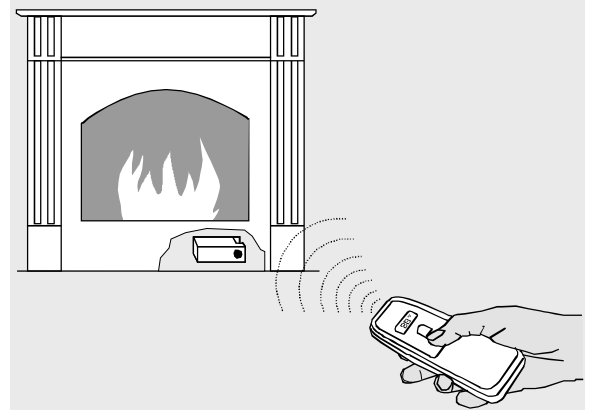

G30-ZRPS

Standard hand-held remote



G30-ZRPSO

Standard hand-held remote for open fires



G30-ZRPD

Hand-held remote with room temperature display



G30-ZRPDO

Hand-held remote with room temperature display for open fires



G30-ZRP TT

Remote with thermostat and timer function



Remote (not programmable)

- compatible with GV34, 35, 38 gas combination controls and with GV30 & GV36 retrofitted with motors
- compatible with Mertik Maxitrol's previous version receivers.

Remote (programmable)

- compatible with GV34 and GV36* retrofitted with motor
- 4 set points programmable

*manufactured since September 2001

Technical Data

Ultrasound transmission	Frequency:	ON 40,5kHz, OFF 40kHz
Ambient temperature range	Working Range:	1,6'/0,5 to 32.8'/10m
Batteries	Remote and Receiver:	max. 140°F / 60°C
Connecting cable	Connecting cable:	max. 356°F / 180°C
	Quality Alkaline:	Remote: 1 x 9 V Block Receiver: 4 x 1,5 V AA
	Standard length:	31.5" / 0,8m

Caution, if the appliance is left unattended in the on position extraneous sound waves can activate the ultrasonic receiver and change the flame height adjustment.